




50x50x10mm

# AD50-10T Series



DC Axial Fan

## Specification:

- **Air Flow** : 8 ~ 10 CFM
- **Housing** : Thermoplastic PBT, UL94V-0
- **Impeller** : Thermoplastic PBT, UL94V-0
- **Bearing** : Ball or Sleeve
- **Termination** : Lead Wire UL2468 AWG#26 or Equivalent  
Red Wire Positive (+); Black Wire Negative (-);  
Yellow Wire Function (3)
- **Operating Temperature** : -10°C to + 70°C for Sleeve Type  
-20°C to + 80°C for Ball Type
- **Weight** : 15.3g
- **Function** : *Function type is optional*  
P: Protection (Automatic restart when lock up removed)  
A: Alarm  
I: Inspect

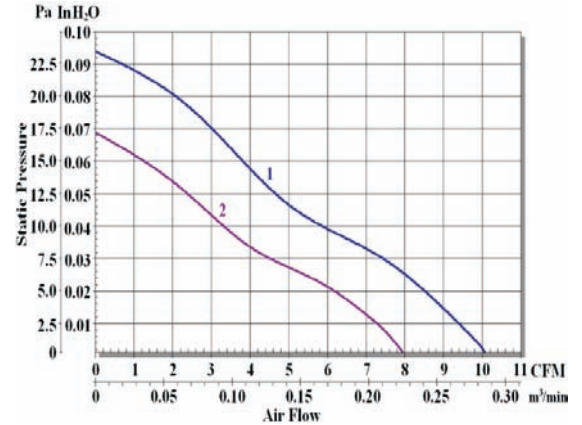

## Outline Dimension

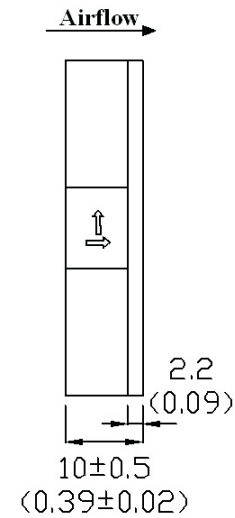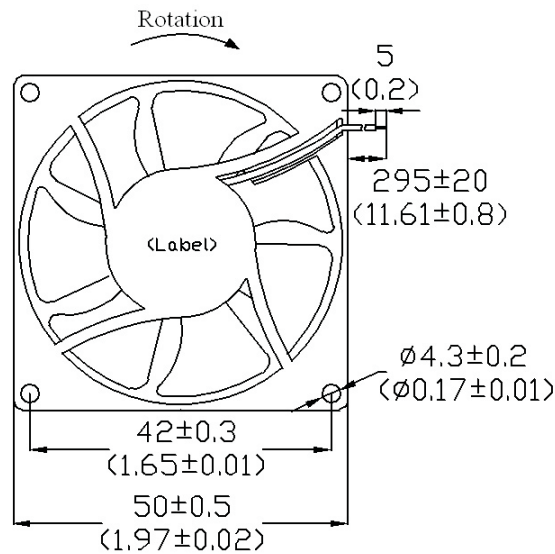

Unit:mm(Inch)

Item Code	Rated Voltage	Rated Current (A)	Input Power (W)	Speed RPM	Max. Air Flow		Noise dB(A)
					CFM	m³/min	
AD05V50-10T-FPH-B7-N1	5V	0.20	1.0	5000	10	0.28	30
AD05V50-10T-FPH-B7-N2	5V	0.16	0.8	4000	8	0.23	24
AD12V50-10T-FPH-B7-N1	12V	0.11	1.3	5000	10	0.28	30
AD12V50-10T-FPH-B7-N2	12V	0.10	1.2	4000	8	0.23	24
AD24V50-10T-FPH-B7-N1	24V	0.07	1.7	5000	10	0.28	30